

IDPVM-1530-NFA

INDOOR DIRECTIONAL ANTENNA, VERTICAL POLAR
 3400MHz ~ 3600MHz
 15.0dBi, 30°HBW, 32°VBW

PRODUCT IMAGE





ELECTRICAL SPECIFICATIONS

Frequency	3400MHz ~ 3600MHz
Gain	15.0dBi
Horizontal Beamwidth	30°
Vertical Beamwidth	32°
Polarization	Vertical
VSWR	≤1.5
Impedance	50Ω
Maximum Input Power	100Watts
Connector	1 x N Female
Lightning Protection	DC Ground
Front-to-back ratio	≥25dB

MECHANICAL SPECIFICATIONS

Dimensions (H x W x D)	210mm x 180mm x 35mm
Weight	0.9Kg
Radome Material	ABS
Radome Color	Grey
Reflector Material	Aluminum Alloy
Installation Pole Diameter	φ30mm ~ φ70mm
Connector Location	Bottom 300mm cable
Installation	Mounting on the wall

RADIATION PATTERNS

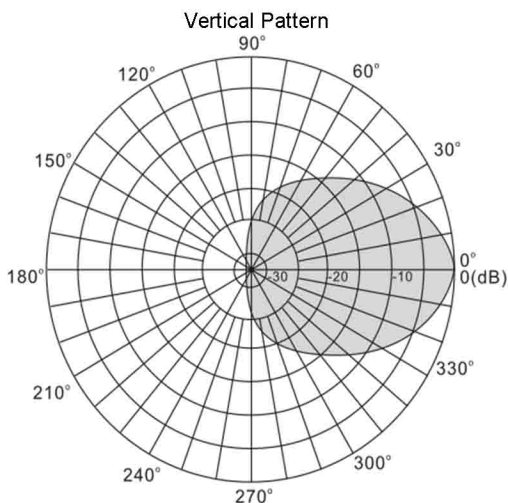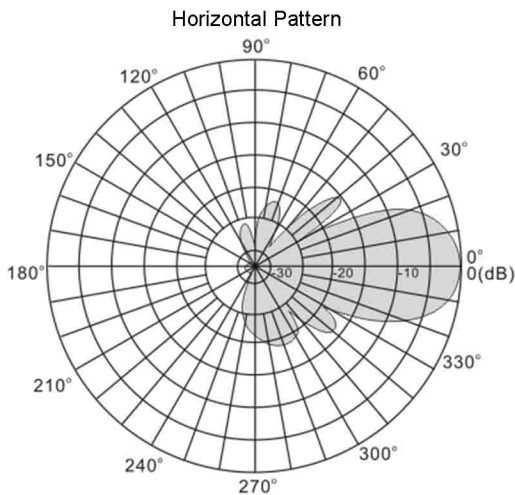

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40°C to +60°C
Wind Loading (N)	0.04m²
Rated Wind Speed	216km/h

ENERSUS RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

EDITION: 08-02

ORDERING INFORMATION

IDPVM-1530-NFA	Antenna, N Female Connector
----------------	-----------------------------