

ODPVM-201400-NFA

OUTDOOR DIRECTIONAL ANTENNA, VERTICAL POLAR
 3350MHz ~ 3650MHz
 20.0dBi, 14°HBW, 15°VBW Fixed EDT 0°

PRODUCT IMAGE





ELECTRICAL SPECIFICATIONS

Frequency	3350MHz ~ 3650MHz
Gain	20.0dBi
Horizontal Beamwidth	14°
Vertical Beamwidth	15°
Polarization	Vertical
VSWR	≤1.4
Impedance	50Ω
Front to Back Ratio	>25dB
Maximum Input Power	150Watts
Electrical Downtilt	0°
Connector	N female
Lightning Protection	DC Ground

MECHANICAL SPECIFICATIONS

Weight	1kg
Dimensions (LxWxD)	350mm x 350mm x 37mm
Reflector Material	Aluminium Alloy
Radiating Element Material	CuAg
Radome Material	ABS
Mechanical Tilt	0°-15°
Installation Pole Diameter	φ30mm ~ φ60mm
Connector Location	Back

RADIATION PATTERNS

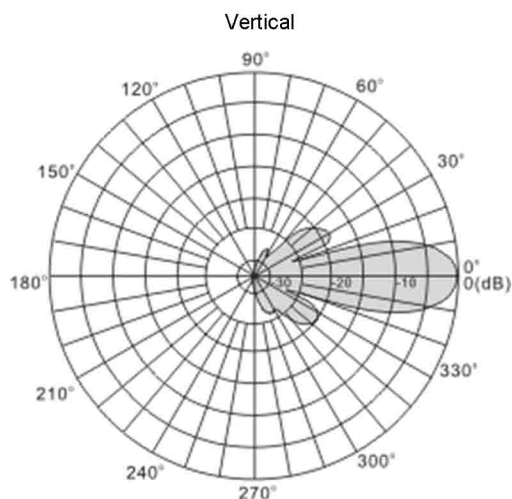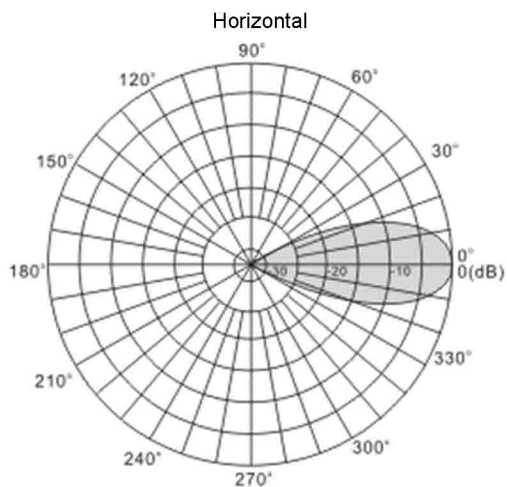

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-30°C to +60°C
Wind Loading (N)	0.12m ²
Rated Wind Speed	216km/h

ENERSUS RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

EDITION: 08-01

ORDERING INFORMATION

ODPVM-201400-NFA	Antenna, 0° Fixed EDT, N Female
------------------	---------------------------------