


SPTCB-XXM-NFA


LOW POWER MICROSTRIP SPLITTERS
800MHz ~ 2500MHz
N Type Female Connectors

PRODUCT IMAGE


SPTCB-02M-NFA



SPTCB-03M-NFA

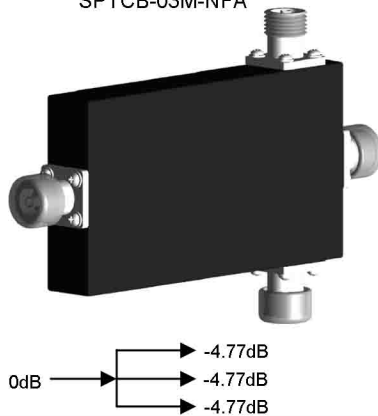

SPTCB-04M-NFA

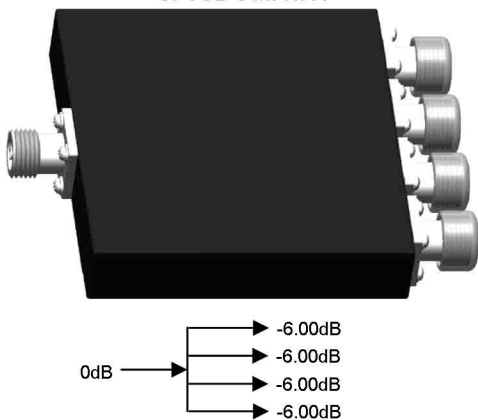

ELECTRICAL SPECIFICATIONS

Frequency	800MHz ~ 2500MHz	
Split Loss	2 Way	3.00dB
	3 Way	4.77dB
	4 Way	6.00dB
Insertion Loss (Dissipative Loss)	2 Way	<0.4dB
	3 Way	<0.5dB
	4 Way	<0.5dB
Return Loss	>20dB	
VSWR	≤1.2	
Impedance	50Ω	
Maximum Input Power	200Watts	
Connectors	N Type Female	

MECHANICAL SPECIFICATIONS

Weights	2 Way	0.50kg
	3 Way	0.55kg
	4 Way	0.60kg
Dimensions	2 Way	89mmH x 57mmW x 22mmD
	3 Way	135mmH x 74mmW x 22mmD
	4 Way	114mmH x 107mmW x 22mmD
Splitter Material	Aluminium	
Connector Material	Brass with Silver Plating	
Mounting Bracket	15mm Raised Stainless Steel Mount	

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40°C to +85°C
IP Rating	IP67

ENERSUS RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

EDITION: 08-01

ORDERING INFORMATION

SPTCB-02M-NFA	2 Way Splitter
SPTCB-03M-NFA	3 Way Splitter
SPTCB-04M-NFA	4 Way Splitter